


Best. Nr. Order no.	Abmessungen/dimensions (mm)					g/Stück g/piece	Stück/Palette piece/palette
	DN	DIAM	ϕD	b	h		
700	50	63mm	83.5 ± 0.5	10.3 ± 0.4	18.1 ± 0.4	24.6	7.290
701	65	75mm	98.0 ± 0.5	11.5 ± 0.4	20.3 ± 0.4	39.4	4.268
702	80	90mm	115.5 ± 0.5	12.8 ± 0.4	22.2 ± 0.4	54.8	2.646
703	100	110mm	138.3 ± 0.8	14.2 ± 0.4	24.2 ± 0.4	78.7	1.824
704		125mm	155.2 ± 0.8	15.1 ± 0.4	25.5 ± 0.4	107.3	1.260
705	125	140mm	171.5 ± 0.8	15.8 ± 0.4	26.1 ± 0.4	117.7	1.008
706	150	160mm	194.4 ± 1.0	17.2 ± 0.4	27.8 ± 0.4	156.1	792
707		180mm	216.4 ± 1.0	18.2 ± 0.4	28.9 ± 0.4	190.5	
708		200mm	238.3 ± 1.0	19.1 ± 0.4	29.2 ± 0.4	216.5	495
709	200	225mm	266.2 ± 1.3	20.6 ± 0.4	31.4 ± 0.4	280.6	360
710		250mm	293.7 ± 1.3	21.0 ± 0.4	32.9 ± 0.4	351.3	330
711	250	280mm	329.1 ± 1.7	24.6 ± 0.5	37.3 ± 0.4	329.0	168
712	300	315mm	367.7 ± 1.7	26.4 ± 0.5	38.9 ± 0.4	633.0	144
713		355mm	413.0 ± 2.2	29.0 ± 0.6	42.5 ± 0.4	838.9	170
714		400mm	464.1 ± 2.2	32.2 ± 0.6	46.4 ± 0.4	1180.0	90
715	400	450mm	518.7 ± 2.6	34.4 ± 0.6	48.6 ± 0.5	1445.9	72
716		500mm	575.6 ± 2.8	37.8 ± 0.8	53.6 ± 1.0	2031.5	66
717		560mm	643.0 ± 3.2	41.5 ± 0.8	57.8 ± 1.0	2527.6	
718		630mm	721.4 ± 3.6	45.7 ± 0.8	63.0 ± 1.2	3475.4	40
719		710mm	811.0 ± 4.0	50.5 ± 0.8	69.2 ± 1.2	4738.3	
720		800mm	902.2 ± 4.5	54.3 ± 1.0	72.4 ± 1.5	6455.0	30

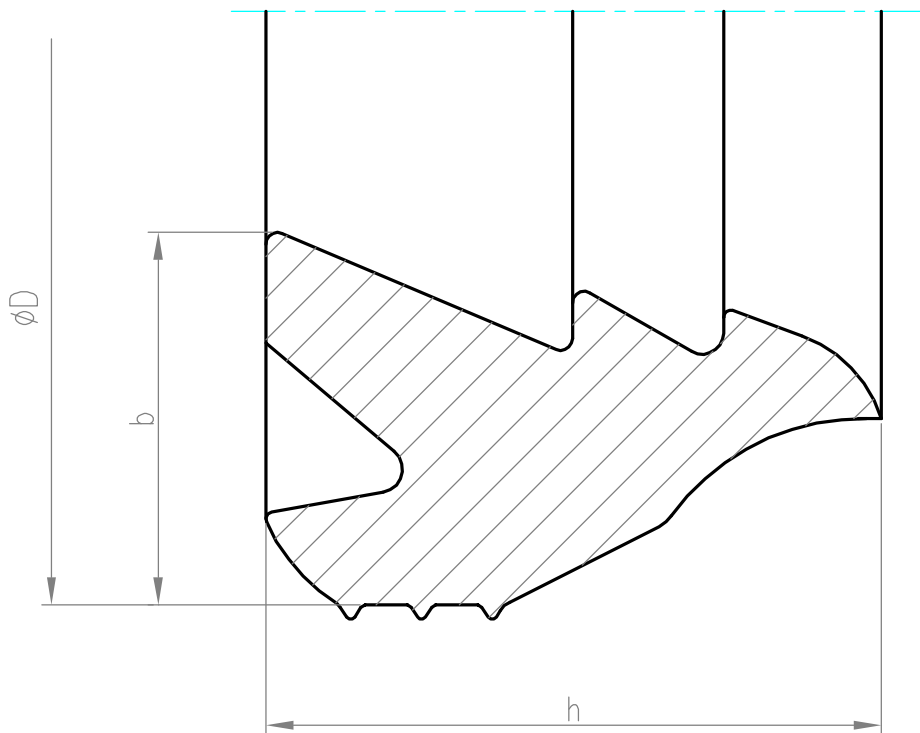

Schutzvermerk ISO 16016 beachten.

2016 Reinking

Wir behalten uns technische Änderungen vor
We reserve technical modifications



M.O.L. Gummiverarbeitung
GmbH & Co. KG
Gutenbergstr. 12-14
49377 Vechta

Druckrohrdichtung

Sealing ring for pressure pipes
DN 50–800 EPDM 60±5 IRHD