


Abmessungen und Gewichte/dimensions and weights (mm,g,kg)

Best. Nr. Order no.	DN	DIAM	ϕD	b	h	g/St. g/pc.	St./Rol. pc./rol.	St./KRV pc./KRV	St./Kart. pc./kart.	St./lose KRV pc./lose KRV
505		34mm	44.8 ± 0.3	6.8 ± 0.3	7.8 ± 0.3	4.8	--	--	--	--
506	40	40mm	51.3 ± 0.5	6.8 ± 0.3	7.8 ± 0.3	5.3	33	35640	37818	27840
508	50	50mm	61.6 ± 0.5	6.8 ± 0.3	7.8 ± 0.3	6.7	34	25704	26418	19900
509		54mm	66.5 ± 0.5	6.8 ± 0.3	7.8 ± 0.3	7.1	--	--	lose 19600	19600
507		58mm	69.4 ± 0.5	6.8 ± 0.3	9.0 ± 0.3	9.7	43	16512	16512	13413
511	70	75mm	87.1 ± 0.6	6.8 ± 0.3	7.8 ± 0.3	9.8	34	12750	13260	14000
512		78mm	89.6 ± 0.5	6.8 ± 0.3	9.0 ± 0.3	11.4	46	10764	10764	13200
513		82mm	94.0 ± 0.6	6.8 ± 0.3	7.9 ± 0.3	11.1	50	--	10800	10800
514		102mm	114.5 ± 0.7	8.2 ± 0.3	8.5 ± 0.3	16.5	47	--	6768	6768
518	100	110mm	124.1 ± 0.7	8.2 ± 0.3	9.1 ± 0.3	18.9	44	5104	5544	6700
521	125	125mm	142.0 ± 0.8	9.5 ± 0.3	10.4 ± 0.3	29.5	25	3648	3648	5450
519		135mm	152.3 ± 0.8	9.5 ± 0.3	12.2 ± 0.3	37.8	33	2772	2772	5916
523	150	160mm	179.6 ± 0.8	10.8 ± 0.4	11.7 ± 0.3	46.6	23	1904	1932	3696
525	200	200mm	222.8 ± 1.0	11.9 ± 0.4	13.0 ± 0.3	71.8	20	1116	1116	1116
527	250	250mm	282.0 ± 2.0	16.0 ± 0.5	19.5 ± 0.5	188.4	20/Stapel	1000	1000	1500
529	300	315mm	350.1 ± 2.5	17.2 ± 0.5	20.5 ± 0.5	255.4	20/Stapel	--	720	1080
531	400	400mm	441.2 ± 3.0	19.7 ± 0.5	24.0 ± 0.5	396.8	10/Stapel	--	400	600
533	500	500mm	550.6 ± 3.0	26.0 ± 0.5	30.0 ± 0.5	751.5	5/Stapel+ 5 im Stapel	250	--	250

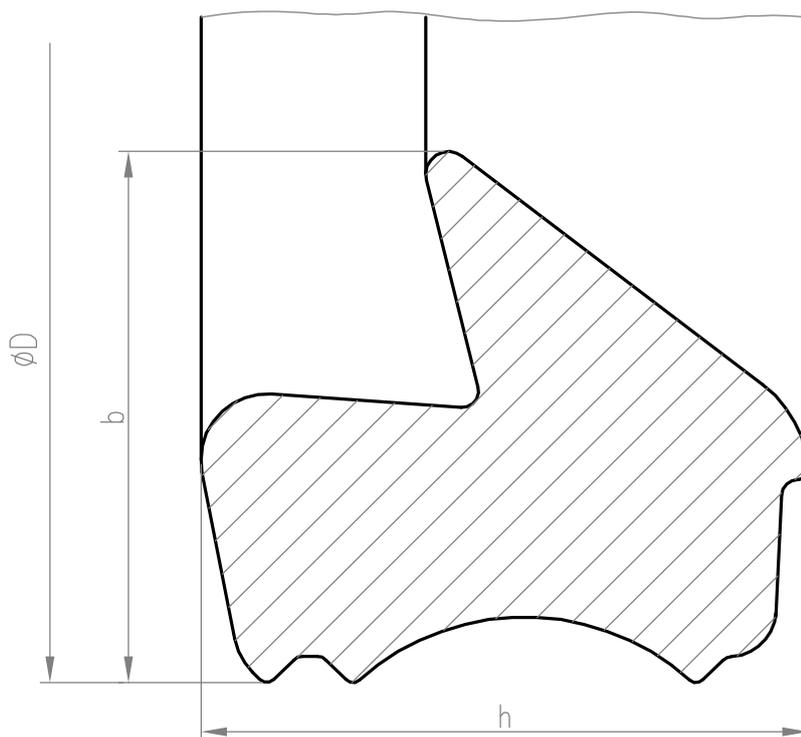

2017 Reinking

Wir behalten uns technische Änderungen vor
We reserve technical modifications



M.O.L. Gummiverarbeitung
GmbH & Co. KG
Gutenbergstr. 12-14
49377 Vechta

Lippendichtring System UNI
Lipseal ring system UNI
DN 34–500 SBR 60±5 IRHD