


Abmessungen und Gewichte/dimensions and weights (mm,g,kg)

Best. Nr. Order no.	DN	DIAM	ØD	b	h	g/St. g/pc.	St./Palette pc./palette
60700	50	63 mm	83.5 ± 0.5	10.3 ± 0.4	18.1 ± 0.4	24.6	7290
60701	65	75 mm	98.0 ± 0.5	11.5 ± 0.4	20.3 ± 0.4	39.4	4268
60702	80	90 mm	115.5 ± 0.5	12.8 ± 0.4	22.2 ± 0.4	54.8	2646
60703	100	110 mm	138.3 ± 0.8	14.2 ± 0.4	24.2 ± 0.4	78.7	1824
60704		125 mm	155.2 ± 0.8	15.1 ± 0.4	25.5 ± 0.4	107.3	1260
60705	125	140 mm	171.5 ± 0.8	15.8 ± 0.4	26.1 ± 0.4	117.7	1008
60706	150	160 mm	194.4 ± 1.0	17.2 ± 0.4	27.8 ± 0.4	156.1	792
60707		180 mm	216.4 ± 1.0	18.2 ± 0.4	28.9 ± 0.4	190.5	
60708		200 mm	238.3 ± 1.0	19.1 ± 0.4	29.2 ± 0.4	216.5	495
60709	200	225 mm	266.2 ± 1.3	20.6 ± 0.4	31.4 ± 0.4	280.6	360
60710		250 mm	293.7 ± 1.3	21.0 ± 0.4	32.9 ± 0.4	351.3	330
60711	250	280 mm	329.1 ± 1.7	24.6 ± 0.5	37.3 ± 0.4	329.0	168
60712	300	315 mm	367.7 ± 1.7	26.4 ± 0.5	38.9 ± 0.4	633.0	144
60713		355 mm	413.0 ± 2.2	29.0 ± 0.6	42.5 ± 0.4	838.9	170
60714		400 mm	464.1 ± 2.2	32.2 ± 0.6	46.4 ± 0.4	1180.0	90
60715	400	450 mm	518.7 ± 2.6	34.4 ± 0.6	48.6 ± 0.5	1445.9	72
60716		500 mm	575.6 ± 2.8	37.8 ± 0.8	53.6 ± 1.0	2031.5	66
60717		560 mm	643.0 ± 3.2	41.5 ± 0.8	57.8 ± 1.0	2527.6	
60718		630 mm	721.4 ± 3.6	45.7 ± 0.8	63.0 ± 1.2	3475.4	40
60719		710 mm	811.0 ± 4.0	50.5 ± 0.8	69.2 ± 1.2	4738.3	
60720		800 mm	902.2 ± 4.5	54.3 ± 1.0	72.4 ± 1.5	6455.0	30

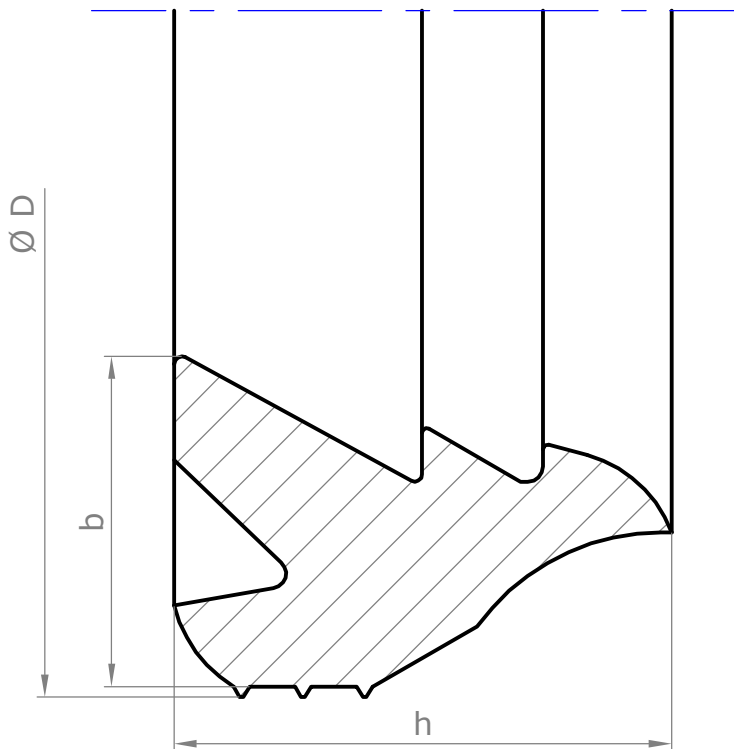

2020 Reinking

Wir behalten uns technische Änderungen vor
We reserve technical modifications



M.O.L. Gummiverarbeitung
GmbH & Co. KG
Gutenbergstr. 12-14
49377 Vechta

Druckrohrdichtung

Sealing ring for pressure pipes

DIAM 63-800 EPDM 60±5 IRHD