


Abmessungen und Gewichte/dimensions and weights (mm,g,kg)

Best. Nr. Order no.	DN	DIAM	∅D	b	h	g/St. g/pc.	St./Ro. pc./rol.	St./Kart. pc./kart.	St./KRV. pc./KRV.	St./Con.Kart. pc./con.kart.
646	40	40mm	50.9 ± 0.5	8.0 ± 0.3	8.9 ± 0.3	5.4				
648		58mm	68.8 ± 0.5	7.6 ± 0.3	9.0 ± 0.3	7.4			12.000	
649	100 S	110mm	122.8 ± 0.7	8.5 ± 0.3	9.8 ± 0.3	18.4	42	5.292	7.938	
650	100 B	110mm	122.8 ± 0.7	8.9 ± 0.3	10.5 ± 0.3	19.9	39	4.914	5.400	4.524
651	125	125mm	139.6 ± 0.8	9.9 ± 0.3	11.2 ± 0.3	28.2	36	3.456	5.000	
652	150	160mm	176.4 ± 0.9	11.3 ± 0.4	12.6 ± 0.4	45.7	31	1.860	3.500	1.860
659	150	160mm	177.0 ± 0.9	12.0 ± 0.4	12.6 ± 0.4	49.3	31	1.860	3.500	
653	200	200mm	218.5 ± 1.0	12.8 ± 0.4	14.0 ± 0.4	69.6	29	1.044	2.200	
660	200	200mm	219.1 ± 1.0	13.5 ± 0.4	14.0 ± 0.4	75.6	29	1.044	2.200	
654	250	250mm	276.2 ± 1.0	19.6 ± 0.6	21.5 ± 0.5	203.9	5 pro Stapel	605	900	
655	300	315mm	342.8 ± 2.4	20.6 ± 0.6	22.9 ± 0.5	279.7	6 pro Stapel	400	600	
656	400	400mm	431.4 ± 3.0	23.4 ± 0.8	26.6 ± 0.8	486.9	5 pro Stapel	200	250	
657	500	500mm	538.2 ± 3.5	28.6 ± 1.0	32.9 ± 1.0	904.3	5 pro Stapel	110	110	
658	600	630mm	675.3 ± 4.0	34.1 ± 1.2	37.9 ± 1.2	1477.6	3 pro Stapel	60	60	

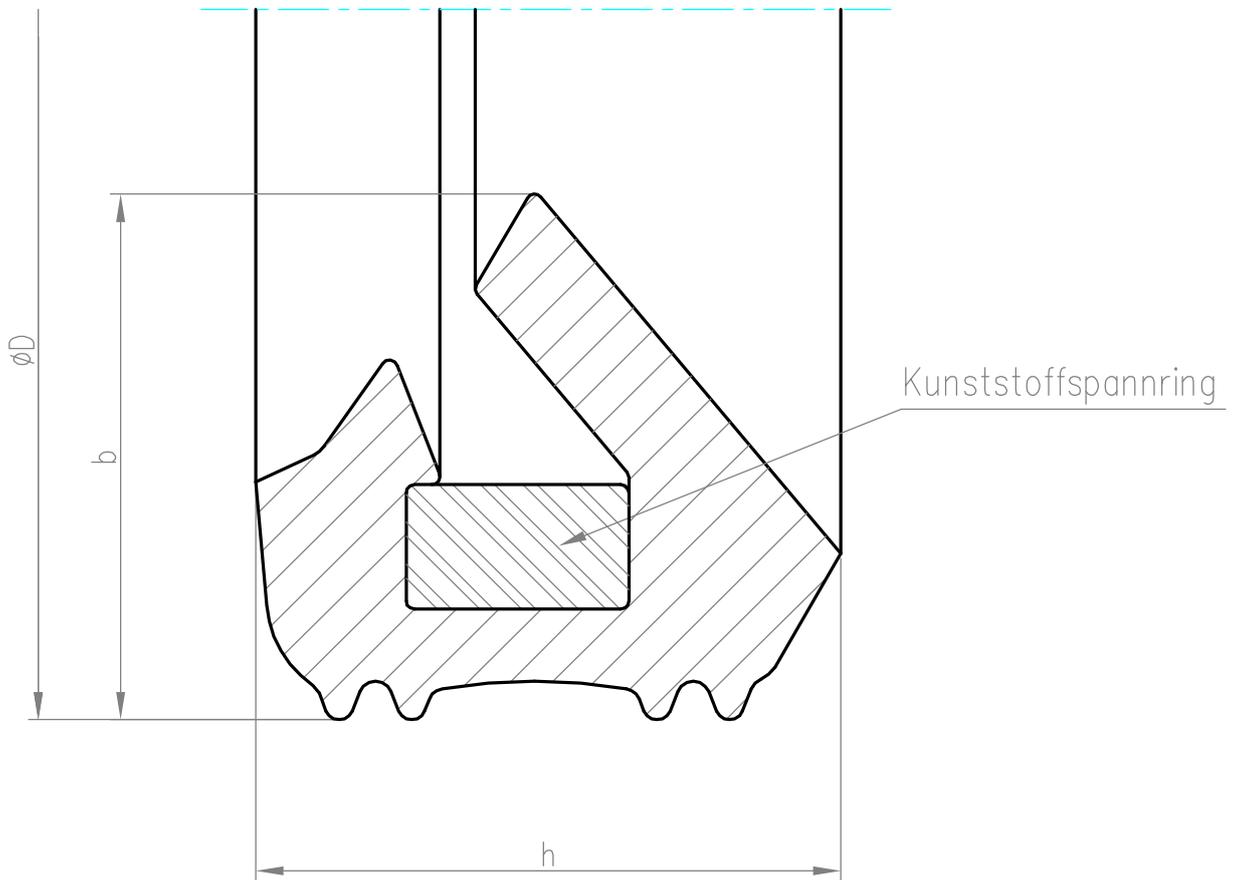

2017 Reinking

Wir behalten uns technische Änderungen vor
We reserve technical modifications



M.O.L. Gummiverarbeitung
GmbH & Co. KG
Gutenbergstr. 12-14
49377 Vechta

Lippendichtring System SK
Lipseal ring system SK
DN 40 – 630 EPDM 50±5 IRHD