



M|O|L

get flexibility



System BL

Lip-Seal-Ring | Ø 25 - 1000 mm

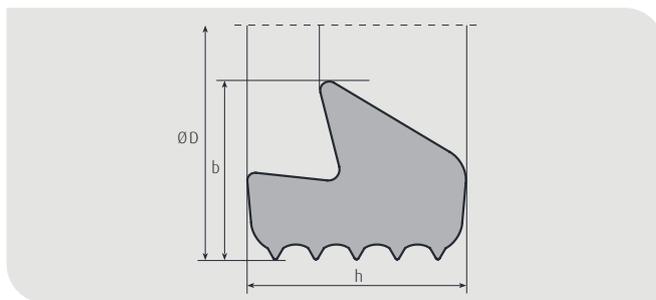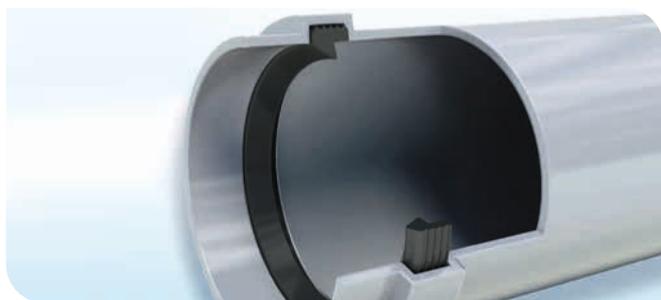

Product description:

The SYSTEM BL lip seal ring is developed for plastic pipes and fittings made of PP and PVC in compliance with EN 1451-1 and EN 1401-1 and meets the requirements of EN 681-1 WC. The socket dimensions recommended by M.O.L. apply as well as for other pipe systems. The SYSTEM BL seal is mainly used for sewage pipes but is also suitable for use in building systems (high-temperature resistance drainage pipes). Special dimensions, also for non-standardised applications, are available on request.

The advantages:

The outstanding long-term elasticity of the rubber seal ensures a durable sealing effect

- Use of the latest technologies guarantees an optimum cost-benefit ratio
- The seal can be fitted both by hand and with automatic ring inserters
- A long-term experience and monitored quality systems (including DIN ISO 9001:2008) guarantee the highest possible safety and reliability
- Good connecting properties
- External monitoring by the MPA-NRW/KIWA KOMO

Article No.	DN	DIAM	Ø D	b	h
60599	25	25	33,0 +/-0,4	4,95 ± 0,3	6,0 ± 0,3
60104	32	32	39,6 ± 0,5	4,9 ± 0,2	6,1 ± 0,2
60580	40	40	51,3 ± 0,5	6,8 ± 0,3	7,8 ± 0,3
60581	50	50	61,6 ± 0,5	6,8 ± 0,3	7,8 ± 0,3
60569	50B	50	61,6 ± 0,5	7,0 ± 0,3	8,4 ± 0,3
60603	58	58	68,7 ± 0,5	6,9 ± 0,3	9,0 ± 0,3
60597		63	74,2 ± 0,6	6,8 ± 0,3	7,8 ± 0,3
60582	70	75	87,1 ± 0,6	6,8 ± 0,3	7,8 ± 0,3
60596	70B	75	87,1 ± 0,6	7,0 ± 0,3	8,4 ± 0,3
60578		90	102,8 ± 0,7	7,5 ± 0,3	8,2 ± 0,3
60579		100	113,8 ± 0,7	7,9 ± 0,3	8,9 ± 0,3
60583	100	110	124,1 ± 0,7	7,9 ± 0,3	9,1 ± 0,3
60595	100B	110	123,8 ± 0,7	8,1 ± 0,3	10,6 ± 0,3
60592		100 SSR	123,8 ± 0,7	7,9 ± 0,3	10,9 ± 0,3
60584	125	125	142,0 ± 0,8	9,1 ± 0,3	10,4 ± 0,3
60575	125B	125	141,8 ± 0,8	9,5 ± 0,3	12,1 ± 0,3
60577	140B	140	163,0 ± 0,8	11,5 ± 0,4	15,5 ± 0,4
60585	150	160	179,6 ± 0,8	10,2 ± 0,3	11,7 ± 0,3
60576	150B	160	179,6 ± 0,8	11,0 ± 0,3	13,5 ± 0,3
60586	200	200	224,0 ± 1,0	11,4 ± 0,3	13,0 ± 0,3
60593		9 inch	268,5 ± 1,8	13,4 ± 0,4	16,3 ± 0,3
60594	250S	250	273,5 ± 1,8	13,4 ± 0,4	16,3 ± 0,4
60587	250	250	282,0 ± 2,0	16,0 ± 0,4	19,5 ± 0,5
60598	300S	315	344,0 ± 2,0	15,0 ± 0,4	18,5 ± 0,5
60588	300	315	350,1 ± 2,5	17,0 ± 0,4	20,5 ± 0,5
60602	350	355	393,7 ± 2,6	18,9 ± 0,5	23,7 ± 0,5
60589	400	400	441,2 ± 3,0	19,0 ± 0,5	24,0 ± 0,5
60590	500	500	550,6 ± 3,0	24,6 ± 0,5	30,0 ± 0,5
60591	600	630	688,8 ± 3,6	29,3 ± 0,7	34,2 ± 0,7
71392	710	710	778,0 ± 4,0	32,0 ^{+1,0} _{-0,4}	40,0 ± 1,0
72024	800	800	872,0 ± 5,0	36,5 ^{+1,4} _{-0,4}	49,0 ± 1,0
72024	1000	1000	1075,0 ± 5,0	36,5 ^{+1,4} _{-0,4}	49,0 ± 1,0



Subject to technical modifications. With regard to the material properties given in the tables and diagrams we only guarantee the figures required by the relevant standards. Our product information is supplied to the best of our knowledge. However, we do not accept any legal liability for the contents. Our General Terms and Conditions of Sale are available online at www.mol-elastomer.de.