


Abmessungen/dimensions (mm, g)

Best. Nr. Order no.	DN	DIAM	ØD	b	h	g/St. g/pc.
60150	100	110 mm	123,2 ± 0,7	8,5 ± 0,2	9,1 ± 0,2	20,0
60152	125	125 mm	140,2 ± 0,8	9,5 ± 0,2	10,3 ± 0,3	28,0
60154	150	160 mm	177,2 ± 0,8	10,4 ± 0,3	11,5 ± 0,3	45,0
60156	200	200 mm	218,0 ± 1,0	12,5 ± 0,3	13,1 ± 0,3	75,0
60158	250	250 mm	277,0 ± 2,0	18,0 ± 0,6	21,0 ± 0,6	197,0
60160	300	315 mm	343,0 ± 2,0	19,6 ± 0,6	22,5 ± 0,6	279,0
60162	400	400 mm	434,1 ± 3,0	22,5 ± 0,8	26,0 ± 0,8	467,0
60164	500	500 mm	541,3 ± 3,5	27,4 ± 1,0	34,6 ± 1,0	1062,0
60166	600	630 mm	679,6 ± 4,0	32,8 ± 1,2	41,0 ± 1,2	1746,0

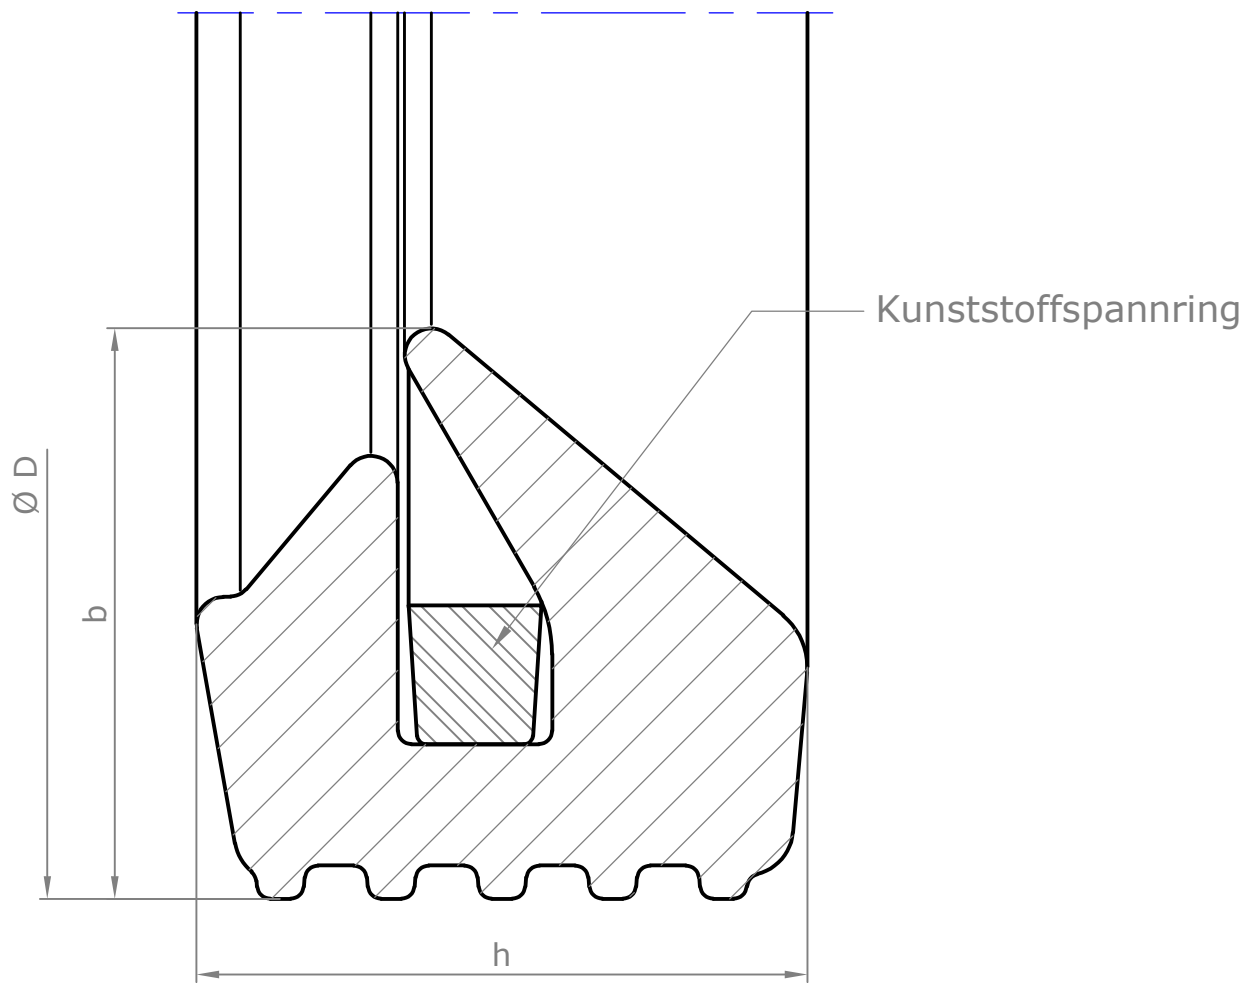

Schutzvermerk ISO 16016 beachten./Refer to protection notice ISO 16016.

2023 Reinking

Wir behalten uns technische Änderungen vor
We reserve technical modifications



M.O.L. Gummiverarbeitung
GmbH & Co. KG
Gutenbergstr. 12-14
49377 Vechta

Lippendichtring System EL
Lipseal ring system EL
DIAM 110-630 SBR 40±5 IRHD