

M|O|L
get flexibility





© Seals for plastic pipes

System 3 S

Seal for pressure pipes | Ø 63 - 800 mm

Suitable for use in drinking water supply pipes

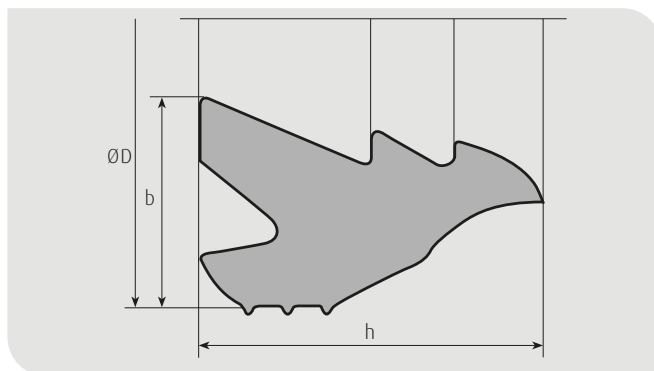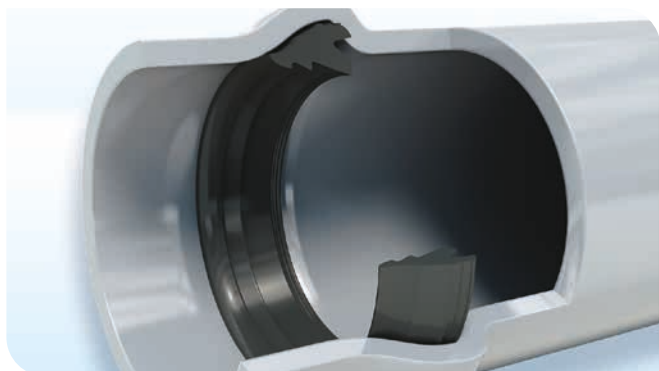

Product description:

The SYSTEM 3S lip seal ring is developed for pressure pipes and fittings in compliance with EN 1452 and EN 1456 and meets the requirements of EN 681-1, type WC.

The unique seal design with three lips ensures the best connecting properties and a reliable pipe connection. The first lip centres the end of the pipe, the second lip retains any contaminants and the third, large sealing lip optimally seals the pipe connection.

The advantages:

- The outstanding long-term elasticity of the rubber seal ensures a durable sealing effect
- The three-lip design minimises the connecting forces
- The seal is not pushed out when the pipes are laid
- Use of the latest technologies ensures an optimum cost-benefit ratio
- A long-term experience and monitored quality systems (including DIN ISO 9001:2008) guarantee the highest possible safety and reliability

Article No.	DN	DIAM	Ø D	b	h
60700	50	63	83,5 ± 0,5	10,3 ± 0,4	18,1 ± 0,4
60701	65	75	98,0 ± 0,5	11,5 ± 0,4	20,3 ± 0,4
60702	80	90	115,5 ± 0,5	12,8 ± 0,4	22,2 ± 0,4
60703	100	110	138,3 ± 0,8	14,2 ± 0,4	24,2 ± 0,4
60704		125	155,2 ± 0,8	15,1 ± 0,4	25,5 ± 0,4
60705	125	140	171,5 ± 0,8	15,8 ± 0,4	26,1 ± 0,4
60706	150	160	194,4 ± 1,0	17,2 ± 0,4	27,8 ± 0,4
60707		180	216,4 ± 1,0	18,2 ± 0,4	28,9 ± 0,4
60708		200	238,3 ± 1,0	19,1 ± 0,4	29,2 ± 0,4
60709	200	225	266,2 ± 1,3	20,6 ± 0,4	31,4 ± 0,4
60710		250	293,7 ± 1,3	21,0 ± 0,4	32,9 ± 0,4
60711	250	280	329,1 ± 1,7	24,6 ± 0,5	37,3 ± 0,4
60712	300	315	367,7 ± 1,7	26,4 ± 0,5	38,9 ± 0,4
60713		355	413,0 ± 2,2	29,0 ± 0,6	42,5 ± 0,4
60714		400	464,1 ± 2,2	32,2 ± 0,6	46,4 ± 0,4
60715	400	450	518,7 ± 2,6	34,4 ± 0,6	48,6 ± 0,5
60716		500	575,6 ± 2,8	37,8 ± 0,8	53,6 ± 1,0
60717		560	643,0 ± 3,2	41,5 ± 0,8	57,8 ± 1,0
60718		630	721,4 ± 3,6	45,7 ± 0,8	63,0 ± 1,2
60719		710	811,0 ± 4,0	50,5 ± 0,8	69,2 ± 1,2
60720		800	902,2 ± 4,5	54,3 ± 1,0	72,4 ± 1,5



Subject to technical modifications. With regard to the material properties given in the tables and diagrams we only guarantee the figures required by the relevant standards. Our product information is supplied to the best of our knowledge. However, we do not accept any legal liability for the contents. Our General Terms and Conditions of Sale are available online at www.mol-elastomer.de.